



TC250X 50Hz POWERED BY CUMMINS SERIES



TECHNICAL SPECIFICATIONS

DIESEL GENERATING SET 400/230V-50Hz-3Phase

Model	TC250X	
Power(ESP)	kVA/kw	250/200
Power(PRP)	kVA/kw	227/180
Rated Voltage	V	400
Rated Current	A	360
Rated rotation speed	r/min	1500
Power Factor		0.8
Fuel Consumption	Litre/hour	49
Fuel Tank Capacity	Litre	Open Type : 303 / Silent Type: 491
Noise level	dB(A)@7m	Silent Type: 76±2

WEIGHT AND DIMENSIONS

GEN-Set	Dimension (L*W*H)	Weight
Open Type	2550mm*980mm*1585mm	1930 Kg
Silent Type	3686mm*1256mm*2068mm	2587 Kg

STANDARDS:

Generator: GB/T2820—2009,ISO8528

Alternator: CEDEX , CX180

Diesel Engine: CUMMINS , 6LTAAS.9-G2

Standby Power: Continues running at variable load for duration of an emergency. No overload is permitted on these ratings.

Prime Power: Continues running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period.

CONFIGURATION:

Standard: Engine, alternator, cooling system, Base frame (excluding fuel tank), shock absorber, air inlet system, control box (including mains floating charge), plastic fan blades (when the engine and water tank do not bring).

Optional: Base frame (including fuel tank), water jacket heater, fuel water separator, fuel heater, fuel level sensor (only supporting underframe tank), switch box (with switch), power switch, the water level sensor, motor anti condensation heater, automatic fueling system (only supporting base frame including fuel tank), battery frame.

Accessories: Silencer, bellow, exhaust silencing system accessories (with the matching engine), regular battery, starting cord assembly, data of gen-set, random tool (with the matching engine).





ENGINE Specification

Manufacturer: CUMMINS

Model	6LTAA 8.9-G2
Engine speed Rated	1500 RPM
Cylinder /Arrangement	6 / L
Displacement	8.9 L
Bore and Stroke	114 mm×145 mm
Compression ratio	16.6 :1
Max. stand by power at rated RPM	240KW
Frequency regulation , steady state	≤1%
Governor : type	Electrical
Aspiration and Cooling	Turbocharged & After-cooled

Exhaust System

Exhaust gas flow	634 L/s
Exhaust temperature	470° C
Max back pressure	10.0kPa

Fuel System

Fuel consumption100% (of the Prime Power)	53L / h
Fuel consumption75% (of the Prime Power)	39L / h
Fuel consumption50% (of the Prime Power)	27L / h
Fuel consumption25% (of the Prime Power)	15L / h

Oil system


Total oil capacity w/filters	27.6 L
------------------------------	--------

Air intake

Engine air flow	254L/s
-----------------	--------

Coolant System

Radiator & engine capacity	47.0 L
Max water temperature	110° C
Thermostat	82-93° C

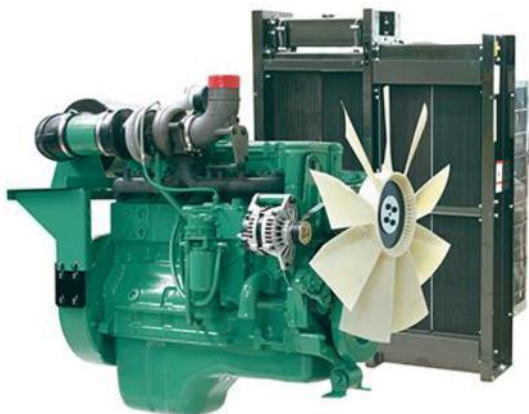

- Cummins engines with advanced design, reliable performance, durable operation.
- Alloy-steel and connecting steel-lever, high durability
- High combustion efficiency and low fuel consumption, work continuously
- P/T pump injection technology, low cost, completely combustion

Note: All data sheets are for reference only and subject to change without prior notice.





ALTERNATOR Specification

Manufacturer: CEDEX

Type	CX180
Number of phase power	3
Factor (Cos Phi)	0.8
Pole	4
Bearing	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
Degree of protection	IP23
Altitude	≤1000m
Winding Pitch	2/3
Winding Leads	6/12


FEATURES

- Class H insulation system
- selectable winding, To meet the demand of the bad environment
- 12 Lead Reconnect, able for different voltage, meet the demand of different countries and regions
- 2/3 pitch windings restrain the content of harmonious
- Different Excitation Systems for different load demand
- Ip23 standard protection, IP44 for option
- Provide single bearing or double bearing

STANDARDS

-IEC60034,NEMA MG1-32,ISO8528,CSA
C22.2-100,VDE 0530,GB755

Note: All data sheets are for reference only and subject to change without prior notice.

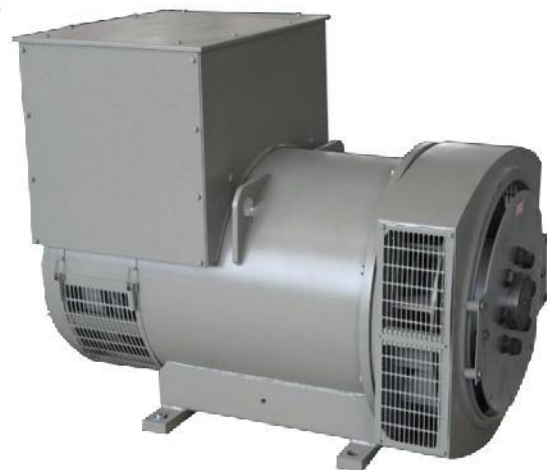

Control Panel

Model: DSE 6020

AUTO START & AUTO MAINS FAILURE CONTROL MODULES

DIMENSIONS

OVERALL

216mm x 158mm x 42mm
(8.5" x 6.2" x 1.6")

PANEL CUTOUT

182mm x 137mm
(7.2" x 5.4")

WEIGHT

400g (0.4kg)



- | | | |
|---|--|---|
| <p>KEY FEATURES</p> <ul style="list-style-type: none"> ➤ Back-lit icon LCD display ➤ Front panel editing ➤ LED and LCD alarm indication ➤ Power Save mode ➤ CAN and Magnetic Pick-up/Alt. versions available (specify on ordering) ➤ PC and front panel configuration ➤ 4 Digital inputs ➤ 3 Analogue inputs ➤ 6 Outputs (4 configurable on Magnetic Pick-up/Alt., 6 configurable on CAN version) ➤ Configurable timers and alarms ➤ Alternative configuration ➤ Event Log (5) ➤ Remote Start input ➤ 3 Phase generator monitoring | <ul style="list-style-type: none"> ➤ Current monitoring and protection ➤ Power monitoring(kW, kV A, kV Ar) ➤ 3 Phase Mains (Utility) monitoring (DSE6020 only) ➤ Test button (DSE6020 only) ➤ Battery Voltage monitoring ➤ Engine pre-heat ➤ Hours counter ➤ Comprehensive shutdown or warning on fault condition <p>KEY BENEFITS</p> <ul style="list-style-type: none"> ➤ Automatically transfers between mains (utility) and generator power (DSE6020 only) ➤ Hours counter provides accurate information for monitoring and maintenance periods ➤ User-friendly set-up and button | <ul style="list-style-type: none"> ➤ Multiple engine parameters are monitored simultaneously ➤ Module can be configured to suit individual applications ➤ Compatible with a wide range of CAN engines ➤ Uses DSE Configuration Suite PC software for simplified configuration ➤ IP65 rating (with optional gasket) offers increased resistance to water ingress ➤ Licence-free PC software. |
|---|--|---|